



PCT/GS/2004/003272

Rec'd PCT



INVESTOR IN PEOPLE


10 SEP 2005

#3

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

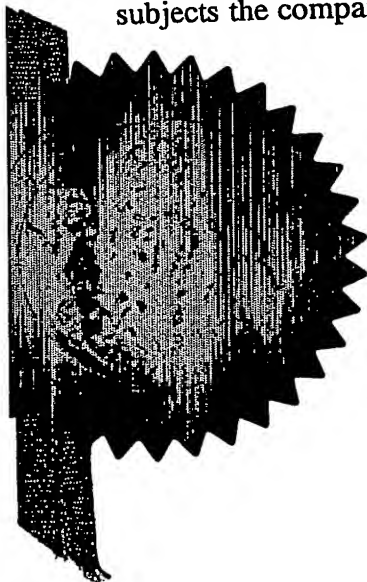

Signed


H. Behen

Dated

5 August 2004

Patents Form 1/77

Patents Act 1977
(Rule 16)

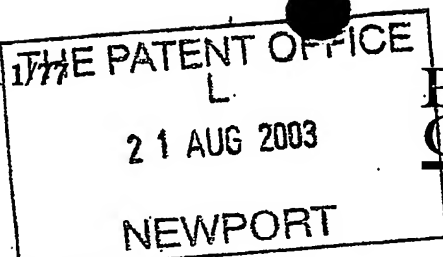

The
Patent
Office

21AUG03 0831891 002565
P01/7700 00-0319636

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

21 AUG 2003

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

XA1818

2. Patent application number

(The Patent Office will fill in this part)

0319636:7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Alenia Marconi Systems Limited

Eastwood House, Glebe Road
Chelmsford, Essex, CM1 1QW

Patents ADP number (if you know it)

07948864001

07948664001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

REFLECTION REDUCTION

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BAE SYSTEMS plc
Group IP Department
Lancaster House, P.O. Box 87
Farnborough Aerospace Centre
Farnborough, Hampshire, GU14 6YU

Patents ADP number (if you know it)

07914674002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 06

Claim(s) 02

Abstract 01

Drawing(s) 01

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Margaret Mackett

Date

20 August 2003

12. Name and daytime telephone number of person to contact in the United Kingdom Maria Burkes 01252 383487

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

- 1 -

REFLECTION REDUCTION

This invention relates to electromagnetic radiation reflecting objects, particularly to the reduction of electromagnetic radiation reflected from objects in the direction of electromagnetic radiation receiving equipment.

5 It is well known to minimise the electromagnetic radiation reflected by objects, for example to minimise the radar cross-section (RCS) of objects, particularly military aeroplanes, by shaping the surface of the object, for example to be spherical to encourage isotropic reflection. However there are circumstances where design constraints such as structural strength, shape
10 requirements or material properties prevent the design achieving the desired reflection characteristics. Also such characteristics are altered by small construction details and by ageing effects such as joint corrosion. The practical realisation of a structure may therefore exhibit undesirable reflection characteristics.

15 The reflection characteristics of problematic structures are sometimes modified by the application of absorbing materials to the surface of the structure to attenuate the reflecting signal. However such materials and surface treatments have limitations. The band of frequencies over which they are effective is limited by the properties of the materials used and the materials may
20 degrade with time requiring repair to maintain the desired reflection characteristics. Such surface treatments are not suitable for structures that require openings, such as windows.

Surface treatments that cause cancellation of reflections by destructive interference are only effective over a limited range of frequencies and such
25 treatments require a skin of material to be applied. Such treatment would not be possible where the surface of the structure is an essential part of the structure function, such as the blade of a wind turbine.

It is therefore an object of the invention to provide means external to a structure to overcome the disadvantages of the prior art, as hereinbefore
30 described.

BEST AVAILABLE COPY

Accordingly the present invention provides apparatus for reducing the electromagnetic radiation reflected from structures in the direction of electromagnetic radiation receiving equipment. It therefore provides a means of reducing the adverse effects of large structures, for example buildings or wind
5 turbines on electromagnetic radiation communications (i.e. transmission and reception).

Advantageously the means does not degrade with time, unlike the rubbery materials used in the prior art which tend to crumble or absorb water over time, thereby degrading performance.

10 In accordance with the present invention the apparatus comprises an array of at least one substantially reflective panel provided between at least one object and at least one electromagnetic radiation receiver, and arranged to reflect and disperse incident electromagnetic radiation away from each receiver.

For the purpose of this invention, the term 'array' is used to describe a
15 two- or three-dimensional, regular or irregular, arrangement of the panels.

The apparatus may be attached to an outer surface of each object or may be placed distant from each object.

The substantially reflective panels may be made of materials reflective to electromagnetic radiation or may comprise a substrate having a reflective
20 coating. Such sheets of reflective material or sheets with reflective surfaces are relatively inexpensive.

Optionally, at least one of the panels is substantially absorptive to electromagnetic radiation. The absorptive properties lead to a reduction of the electromagnetic radiation reflected from the array, thereby reducing the
25 electromagnetic radiation reflected in the direction of the receiving equipment.

Advantageously, the panels may be generally planar or generally curved, and the size and shape of the panels may be chosen as required, for example for aesthetic purposes.

Additionally, at least one of the panels may have a multi-faceted surface such that each of such panels reflects and disperses electromagnetic radiation away from the receiving equipment.

Optionally, the reflective panels are coloured, for example by chemical
5 treatment or the application of paint. This is advantageous for aesthetic purposes.

In accordance with another aspect of the present invention, a method or
reducing the electromagnetic radiation reflected from at least one object in the
direction of at least one electromagnetic radiation receiver may comprise the
10 steps of:

- i) determining the direction of each receiver from each object
- ii) providing an array of at least one substantially reflective panel
between each object and receiver
- 15 iii) arranging each panel to reflect and disperse incident
electromagnetic radiation away from each receiver.

The invention will now be described by way of example and with
reference to the accompanying drawings in which:

Figure 1 is a schematic of an embodiment of the invention.

Figure 2 illustrates a variant of the embodiment shown in Figure 1.

20 Figure 3 is a schematic of an alternative embodiment of the invention.

Figure 1 shows the apparatus according to a preferred embodiment of
the invention comprising an array 2 of reflective panels 4, positioned between
an object 6 and electromagnetic radiation receiving equipment 8. The panels
are arranged on a support stand (not shown) at different angles to the plane of
25 the array such that the array reflects and disperses incident electromagnetic
radiation from a source 10 away from the receiving equipment 8. This therefore
provides a means of reducing the adverse effects of structures, for example
buildings and wind turbines, on electromagnetic radiation communications (i.e.
transmission and reception). Unlike the application of absorbing materials or
30 other treatments to the surface of the object as in the prior art, this embodiment

of the present invention is suitable for objects requiring openings, for example buildings with windows and doors, or for objects where the surface of the structure is an essential part of the structure function, such as a wind turbine. It is also robust over a wide band of frequencies, not being limited by the absorptive properties of the material used.

The object masked by the array 2 may comprise more than one distinct structure 7 as shown in Figure 2. This is advantageous when masking, for example, a collection of wind turbines, one array on a support stand being preferable to several arrays on individual support stands, particularly for cost reasons.

The array 2 may be used to mask each object from more than one electromagnetic radiation receiver. Similarly, there may be more than one source of electromagnetic radiation from which each object is masked.

Alternatively, the array 2 may be attached to an outer surface of the object 6, as illustrated in Figure 3. In this embodiment the object 6 provides a support for the reflective panels 4, which may be attached to a backing grid (not shown), eliminating the need for a separate support stand to hold the array at the required position and therefore reducing cost.

The array 2 may comprise any number of reflective panels 4. A single panel may be used but the single unbroken reflective surface could 'illuminate' an adjacent object and a second reflection could possibly be intercepted by the receiving equipment. It is therefore preferable for the array to comprise multiple panels 4, with reflective surfaces at different angles to the incident electromagnetic radiation, so reflections from the individual panels are not correlated.

The panels 4 may be made of material reflective to electromagnetic radiation, for example, an aluminium alloy. This has the advantage of being lightweight and hence does not produce an undue weight burden on the structure supporting the panels. Alternatively, the panels may comprise a substrate having a reflective coating, for example, a metallised glass reinforced plastic (GRP) material. The present invention is highly advantageous over the

- 5 -

prior art as it does not degrade with time, unlike the rubbery materials used in the prior art which tend to crumble or absorb water over time, thereby degrading performance.

At least one of the panels may be substantially absorptive to electromagnetic radiation. The absorption of some of the incident electromagnetic radiation reduces the electromagnetic radiation reflected by the array, thereby reducing the electromagnetic radiation reflected in the direction of the receiving equipment.

Naturally the material used for the panels are chosen to be compatible with the range of frequencies emitted by each source of electromagnetic radiation.

Different reflection characteristics can be provided for by altering the design of the panels 4. The reflective surface of each panel may be flat or curved (not shown).

The panels may be a variety of sizes and shapes, either regular or irregular, for example for aesthetic purposes. At least one of the panels may have a substantially reflective multi-faceted surface such that each of such panels reflects and disperses electromagnetic radiation away from the receiving equipment. The panels may be coloured either by chemical treatment or the application of a paint that does not interfere with the reflective properties of the panels.

Each array is a two- or three-dimensional arrangement of panels. Alternatively, more than one array may be positioned between the object 6 and the electromagnetic radiation receiving means 8. With this embodiment, an object may be masked from more than one range of radiation frequencies simultaneously.

The method used to reduce the electromagnetic radiation reflected from at least one object in the direction of electromagnetic receiving equipment comprises the steps of determining the direction of each electromagnetic radiation receiver from each object, providing an array of at least one substantially reflective panel between each object and each receiver, and

arranging each panel to reflect and disperse incident electromagnetic radiation away from the receiving equipment.

It can therefore be envisaged that an array 2 of panels is supplied, the array positioned between each object and receiver, and the panels adjusted as
5 required to reflect and disperse the incident electromagnetic radiation away from each receiver. Alternatively, the panels are mounted in the array directly in the position required.

Naturally if each receiver or source of electromagnetic radiation changes location, the array 2 may be repositioned or the panels 4 may be adjusted
10 individually (adjustment means not shown in the figures).

CLAIMS

1. Apparatus for reducing the electromagnetic radiation reflected from at least one object in the direction of at least one electromagnetic radiation receiver, the apparatus comprising an array, provided between each object and receiver, of at least one substantially reflective panel, each panel arranged such that the array reflects and disperses incident electromagnetic radiation away from each receiver.
2. Apparatus according to Claim 1 wherein the array of panels is attached to an outer surface of each object.
3. Apparatus according to Claim 1 or 2 wherein the panels are made of material substantially reflective to electromagnetic radiation.
4. Apparatus according to Claim 1 or 2 wherein the panels comprise a substrate having a substantially reflective coating.
5. Apparatus according to any of the preceding claims wherein at least one of the panels is substantially absorptive to electromagnetic radiation.
6. Apparatus according to any of the preceding claims wherein the panels are generally planar.
7. Apparatus according to Claims 1 to 5 wherein the panels are generally curved.
8. Apparatus according to any of the preceding claims, wherein the panels are irregular in shape.
9. Apparatus according to any of the preceding claims wherein at least one of the panels has a substantially reflective multi-faceted surface.
10. A method for reducing the electromagnetic radiation reflected from at least one object in the direction of at least one electromagnetic radiation receiver comprising the steps of:
 - i) determining the direction of each electromagnetic radiation receiver from each object

- 8 -


- ii) providing an array of at least one substantially reflective panel between each object and receiver
 - iii) arranging each panel to reflect and disperse incident electromagnetic radiation away from each receiver.
- 5 11. Apparatus substantially as hereinbefore described, with reference to the accompanying drawings.
12. A method substantially as hereinbefore described.

- 9 -

ABSTRACT**REFLECTION REDUCTION**

An apparatus for reducing the electromagnetic radiation reflected from structures in the direction of electromagnetic radiation receiving equipment is disclosed. The apparatus, situated between an object (6) and a source of electromagnetic radiation (10), comprises an array (2) of at least one substantially reflective panel (4) arranged such that the array reflects and disperses incident electromagnetic radiation away from the receiving equipment (8). The apparatus therefore provides means of reducing the adverse effects of large structures on electromagnetic radiation communications (i.e. transmission and reception).

Figure 1

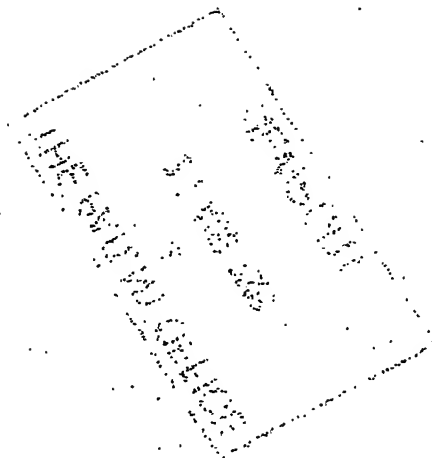**BEST AVAILABLE COPY**

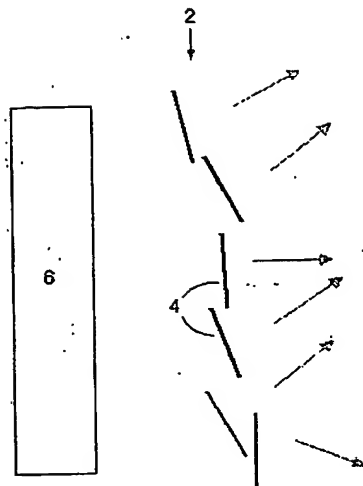


Figure 1

8
□

10
□

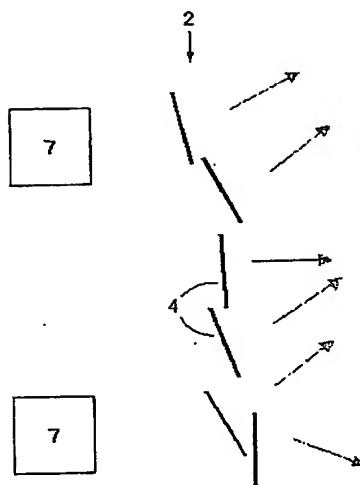


Figure 2

8
□

10
□

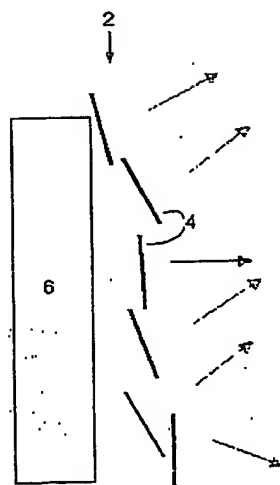


Figure 3

8
□

10
□